





# EASYROOF

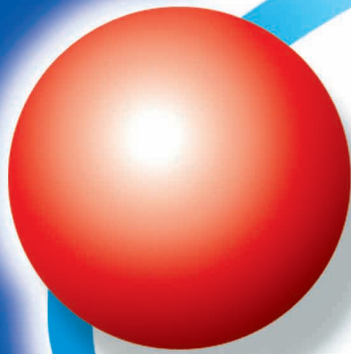

## Polycarbonate multiwall roof panel

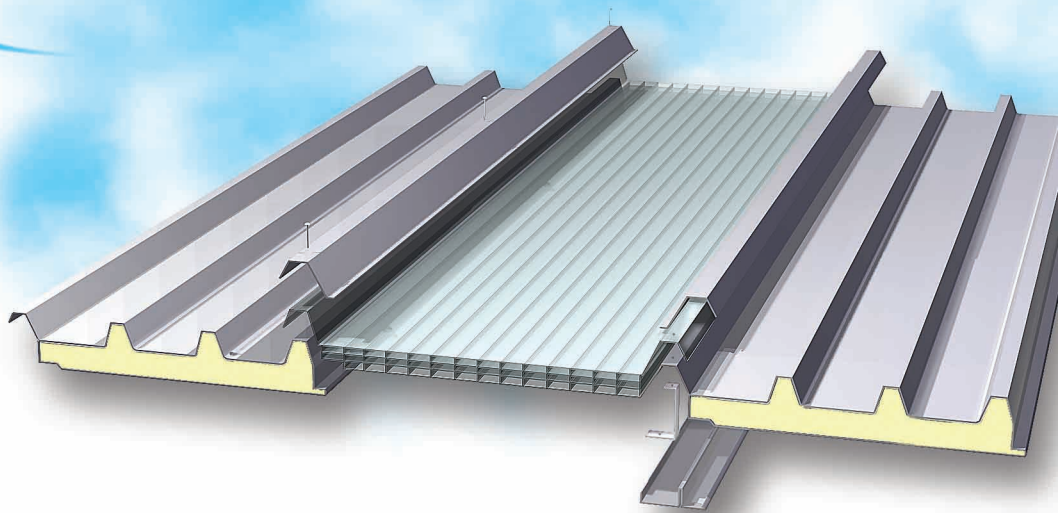


**NEW!**

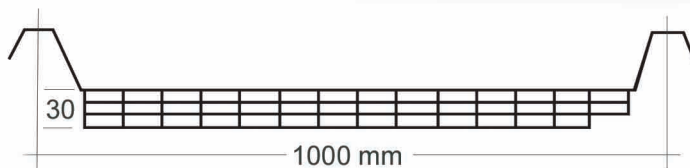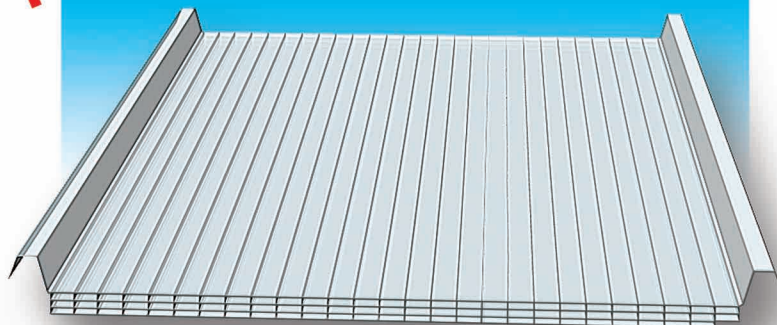

## TECHNICAL DATA

Thickness	30mm	U Value	1.65 W/m <sup>2</sup> °K 1.43 Kcal/m <sup>2</sup> h °C
Standard Width	930mm		
Standard Length	6.000 / 12000 mm		
Rib distance	35 mm	Sound absorption	23 dB
Weight	3.6kg/m <sup>2</sup>	Fire resistance	M 1
Minimum bending radius	6.000 mm	Thermal expansion	0.065 mm/ m °C
Light transmission	Clear 70 %	G value	Clear 61 %
	Opal 35 %		Opal 44 %

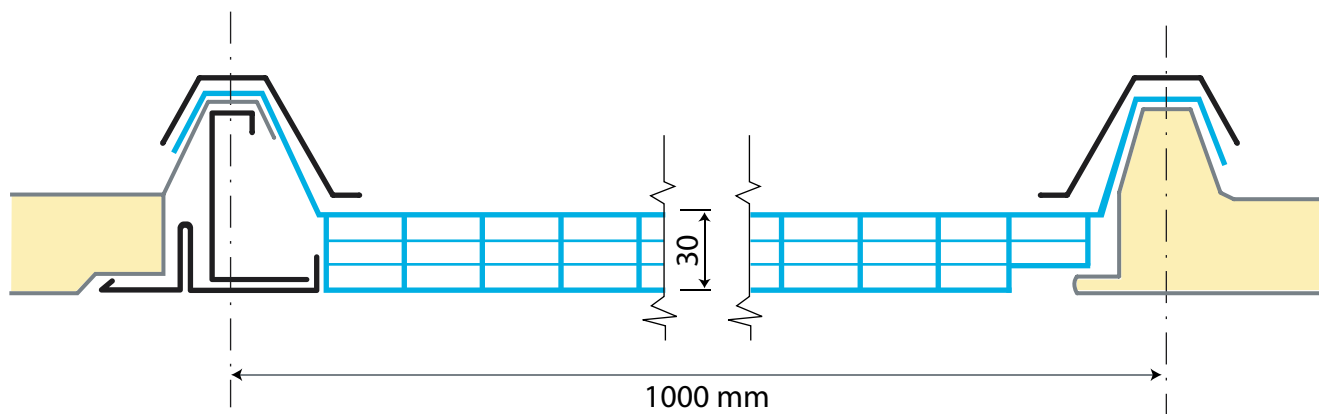

# EASYROOF

## Polycarbonate multiwall roof panel



The polycarbonate system EasyRoof 30 is the high performance and ultimate solution to glaze the industrial building roof.

The advantages of the system can be summarised as follows:

- Easy to install
- Universal system whatever are the section and the thickness of the insulated sandwich panel
- Excellent thermal properties
- Very good fire resistance
- High impact resistance
- 10 years of guarantee

### Breaking Loads

Support distance mm	Pressure N/m <sup>2</sup>	Depression N/m <sup>2</sup>
2200	950	Max. 1400
1900	1250	
1800	1600	
1600	1900	

All the reported data can be changed by Politec SA at any time without obligation of notice. These data are the result of our best knowledge but they are non binding information and do not release Client to make own tests in order to check whether the products are suitable with the use they are planned for. The products having a weight lower than standard one reported herein are not covered by any guarantee.



POLITEC polimeri tecnici S.A.  
Via Lische, 5 - Z.I. 3  
6855 STABIO - SVIZZERA  
Tel. (+41)091 6417140 - Fax. (+41)091 6417149  
www.politecsa.com - direxport@politecsa.com

DC23/03/01 09/2003